


# ENGIRO RE 20-3

20 kW Range Extender


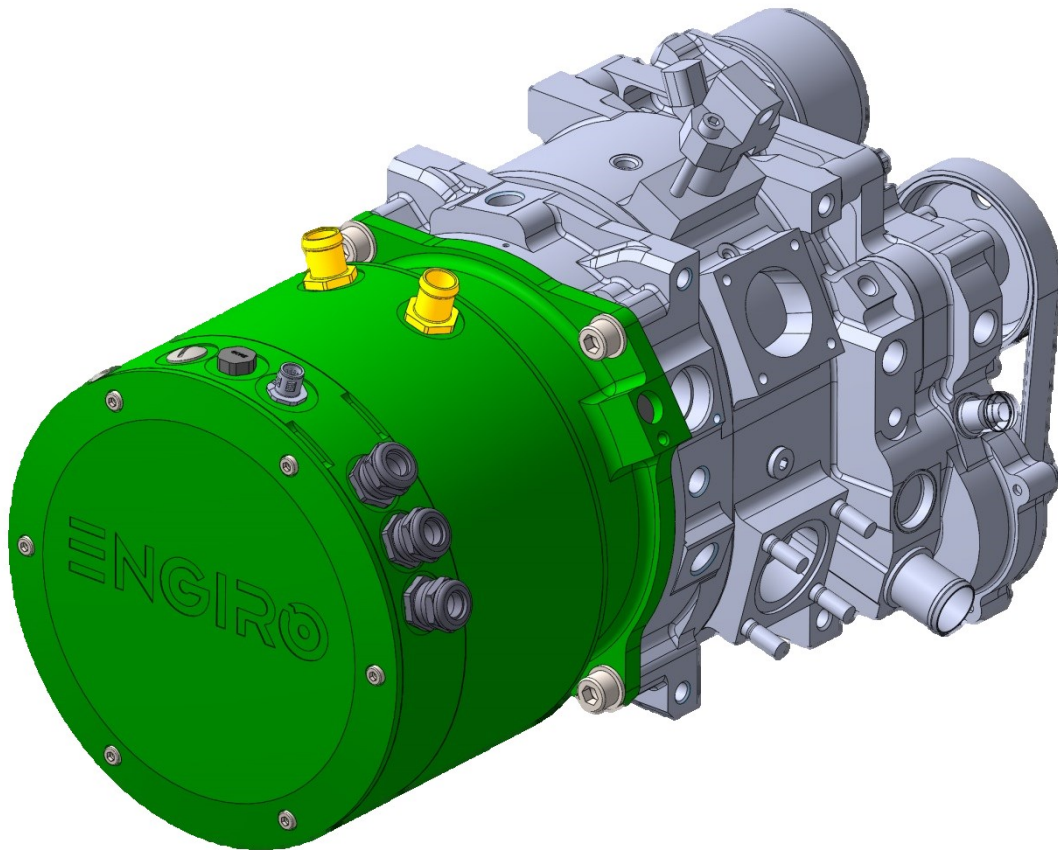


ENGIRO generator with Geiger engine

## KEY FEATURES

- No 12V starter necessary
- High power density
- Continuous power of 20 kW
- Custom voltage ranges from 100V to 650V
- Plug and Play system
- Custom mechanical interfaces possible

General Data RE 20-3		
Rated power	20	kW
Rated speed	6000	rpm
Fuel consumption (ROZ 98)	< 350	g/kWh
Lubrication	Dry oil sump with internal pump	
Voltage range	100 -650	V DC
Width	265	mm
Heigh	238	mm
Total length	446	mm
Weight (w/o cables and controller)	< 37	kg
Protection category	IP 65 (generator)	
Cooling (medium, flow rate, inlet temperature)	Water/glycol 50/50; 6l/min; ≤ 60°C (generator); ≤ 90°C (engine)	
Communication	CANbus J1939 compatible	

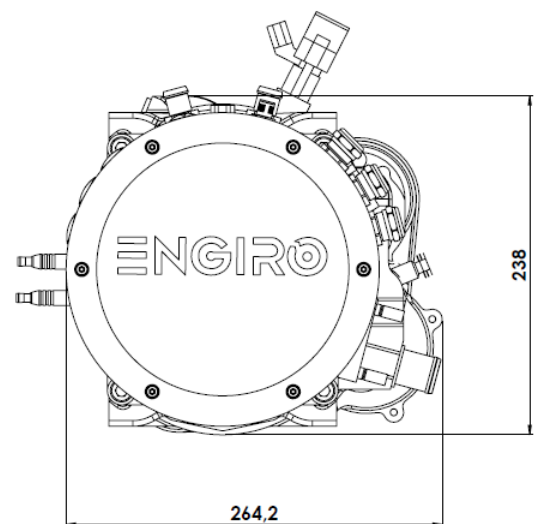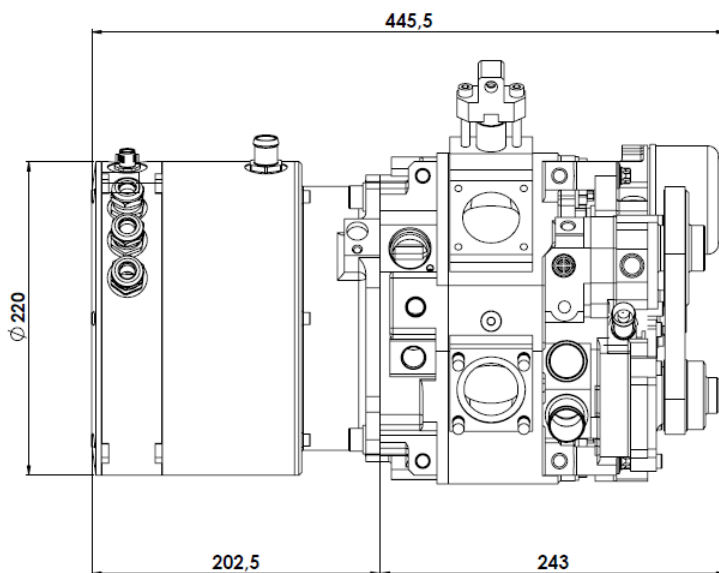

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.