


# AVIAQUIP

## MS51844 Oval Splices (Nicopress Sleeves) Sleeve, Swaging, Wire Rope.

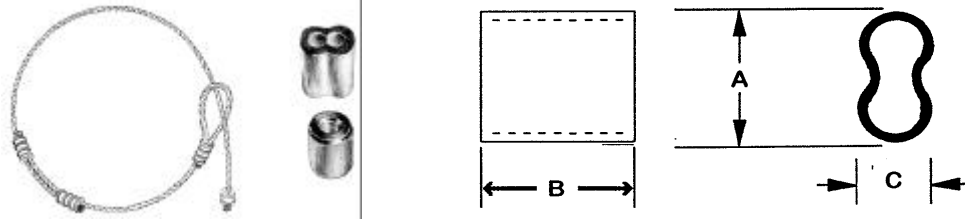

MS51844	NICOPRESS	LOOS & CO	PLATING	CABLE SIZE	A	B	C
-22	28-1-C	SL2-2P	ZINC	1/16	.270	.440	.180
-23	28-2-G	SL2-3P		3/32	.380		.240
-24	28-3-M	SL2-4P		1/8	.512	.750	.340
-25	28-4-P	SL2-5P		5/32	.600		.370
-26	28-6-X	SL2-6P		3/16	.710	1.00	.450
-42	18-1-C	SL2-2	NONE	1/16	.270	.440	.180
-43	18-2-G	SL2-3		3/32	.380		.240
-44	18-3-M	SL2-4		1/8	.512	.750	.340
-45	18-4-P	SL2-5		5/32	.600		.370
-46	18-6-X	SL2-6		3/16	.710	1.00	.450
-82	428-2-VC	SL2-2TP	TIN	1/16	.270	.440	.180
-83	428-3-VG	SL2-3TP		3/32	.380		.240
-84	428-4-VM	SL2-4TP		1/8	.512	.750	.340
-85	428-5-VP	SL2-5TP		5/32	.600		.370
-86	428-6-VX	SL2-6TP		3/16	.710	1.00	.450

## MS20995 SAFETY LOCK WIRE



### MATERIAL SELECTION:

MS20995 C (diameter)      304 Stainless Steel      Not Temperature Rated  
 MS20995 N (diameter)      Inconel      For use at temperature 700°F. and above  
 AVIAQUIP stocks MS20995 C20, C25, C32, C41, C51, CU20, N20, N25, N40, N51, N32  
 NC20, NC32 & NC40

Diameter Selection      Replace (xx) with material code

MS20995(XX)25	MS20995(XX)32	MS20995(XX)41
.025" DIA. For small screws with hole diameter of less than .045"	.032" DIA. General Purpose #10 to 3/8" diameter bolts Secondary Turnbuckles	.041" DIA. Primary Turnbuckles Propeller Bolts Large Fasteners

Product information and part numbers shown on these pages are not guaranteed correct by AVIAQUIP PTY. LTD and are subject to change without notice.